

This Page Is Inserted by IFW Operations
and is not a part of the Official Record

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

IMAGES ARE BEST AVAILABLE COPY.

**As rescanning documents *will not* correct images,
please do not report the images to the
Image Problem Mailbox.**

EUROPEAN PATENT OFFICE

Patent Abstracts of Japan

PUBLICATION NUMBER : 08277869
PUBLICATION DATE : 22-10-96


APPLICATION DATE : 31-03-95
APPLICATION NUMBER : 07100095

APPLICANT : TOYODA GOSEI CO LTD;

INVENTOR : HATANO KATSUYA;

INT.CL. : F16F 1/38 B60G 21/055 F16F 1/16

TITLE : BUSH

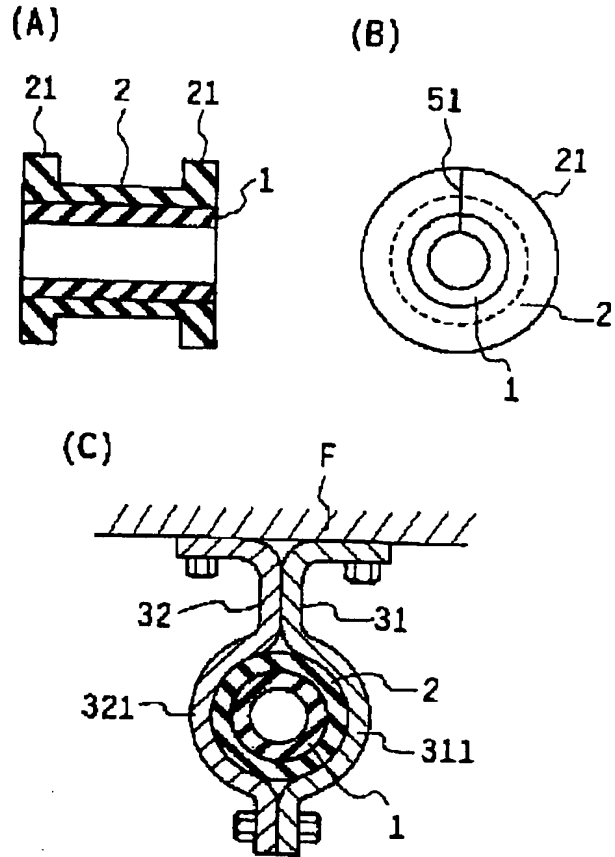

ABSTRACT : PURPOSE: To prevent the side slip of a stabilizer bar insert-held in a stabilizer bush and to prevent the generation of noise caused by the interference with other members.

CONSTITUTION: A bush is provided with a sliding part 2 formed by insert-holding a stabilizer bar in a cylindrical vibration-proof rubber body 1 and jointing material with high sliding property to the periphery of the vibration-proof rubber body 1 so as to cover it. Flanges 21 projecting radially from both axial edges of the sliding part 2 are provided, and the bush is fixed to a base body F by brackets 31, 32 holding the peripheral surface of the sliding part 2 between the flanges 21. Since the vibration-proof rubber body 1 is cylindrical, the surface pressure is uniformly applied to the stabilizer bar, and the stabilizer bar is positively held and fixed to prevent a side slip.

COPYRIGHT: (C)1996,JPO